




**PROMOTION**

Steady Rest  
**ZENTRICO THL Plus**

**20% off**

Hand in hand for tomorrow

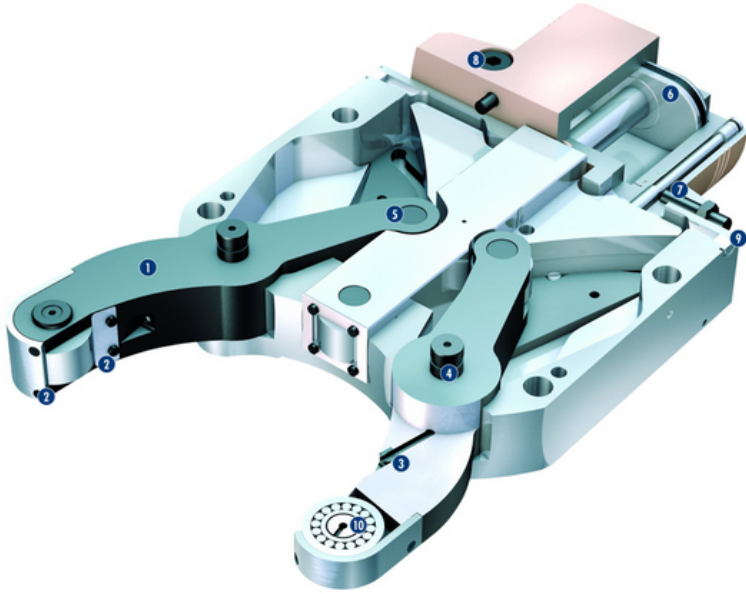


- ① Lever drive
- ② Sealed with double, extremely robust chip protection
- ③ Roller rinsing as standard
- ④ Stable lever bearing
- ⑤ Swing-out lever arm
- ⑥ Oval piston cylinder
- ⑦ Standard version ready for installation of piston position monitoring
- ⑧ Safety check valve
- ⑨ Air purge connection
- ⑩ Roller rinsing

Technical data	Clamping range [min <sup>-1</sup> ]	Operating pressure [bar]	Max. clamping force [kN]	Centering accuracy [mm]	Repeat accuracy [mm]
THL plus 100	4-66	6-50	1	< 0.02	< 0.005
THL-A plus 100	4-52	6-50	1	< 0.02	< 0.005
THL plus 200	8-101	8-60	3.5	< 0.02	< 0.005
THL-A plus 200	8-80	8-60	3.5	< 0.02	< 0.005
THL plus 300	12-152	8-60	10	< 0.04	< 0.007
THL-A plus 300	12-130	8-60	10	< 0.04	< 0.007
THL plus 310	20-165	8-60	10	< 0.04	< 0.007
THL-A plus 310	20-150	8-60	10	< 0.04	< 0.007
THL plus 320	50-220	8-60	10	< 0.04	< 0.007
THL plus 400	35-245	8-60	15	< 0.05	< 0.01
THL-A plus 400	35-220	8-60	15	< 0.05	< 0.01
THL plus 500	50-310	8-60	20	< 0.06	< 0.01
THL-A plus 500	50-268	8-60	20	< 0.06	< 0.01
THL plus 510	85-350	8-60	20	< 0.06	< 0.01
THL plus 600	125-460	8-60	25	< 0.06	< 0.005

Size 300, 310, 400, 500, 510 also available with side mounted cylinder.

Valid until December 31<sup>st</sup>, 2024


**Lateral hydraulic connections**



**Central lubrication**



**Stroke measuring system**



**Distance monitoring**

